




MX405, MX410 and MX415 Miniature Gooseneck Microphones

Flexible in more ways than one, Microflex Miniature Gooseneck Microphones deliver unsurpassed style and performance for conference rooms and similar applications. Offering desktop or mounted bases, wired or wireless options, and even interchangeable cartridges, it's easy to get the perfect fit for your application. Fully compatible with SLX® Wireless Systems, Microflex Wireless Systems and ULX-D Systems.

Specifications

Type	Condenser (electret bias)
Frequency Response	50 Hz – 17 kHz
Polar Pattern	MX405/C, MX410/C, MX415/C: Cardioid MX405/S, MX410/S, MX415/S: Supercardioid
Output Impedance	EIA rated at 150 Ω (170 Ω actual)
Output Configuration	Active balanced
Sensitivity at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL	Cardioid: -35 dBV/Pa (18 mV) Supercardioid: -34 dBV/Pa (21 mV)
Maximum SPL 1 kHz at 1% THD, 1 kΩ load	Cardioid: 121 dB Supercardioid: 120 dB
Equivalent Output Noise A-weighted	Cardioid: 28 dB SPL Supercardioid: 27 dB SPL
Signal-to-Noise Ratio referenced at 94 dB SPL at 1 kHz	Cardioid: 66 dB Supercardioid: 67 dB
Dynamic Range 1 kΩ load at 1 kHz	93 dB
Common Mode Rejection 10 Hz to 100 kHz	45 dB minimum
Preamplifier Output Clipping Level 1% THD	-8 dBV (0.4 V)
Polarity	3-Pin XLR: Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector. 5-Pin XLR: Positive sound pressure on diaphragm produces positive voltage on pin 4 relative to pin 2 of output XLR connector.
Weight	MX405: 54 g MX410: 68 g MX415: 70 g MX400DP: 516 g MX400SMP (w/ Kit): 125 g
Logic Connections	LED IN: Active low (≤1.0 V), TTL compatible. Absolute maximum voltage: -0.7 V to 50 V. LOGIC OUT: Active low (≤1.0 V), sinks up to 20 mA, TTL compatible. Absolute maximum voltage: -0.7 V to 50 V (up to 50 V through 3 kΩ).
Mute Switch Attenuation	-50 dB minimum
Cable	MX400DP: 6 m attached cable with shielded audio pair terminated at a 3-pin male XLR and three unterminated conductors for logic control
Environmental Conditions	Operating temperature: -18 – 57 °C Storage temperature: -29 – 74 °C Relative humidity: 0 – 95%
Power Requirements	48 – 52 Vdc phantom, 8.0 mA

*for detailed dimensions please reference MX405/410/415 user guide

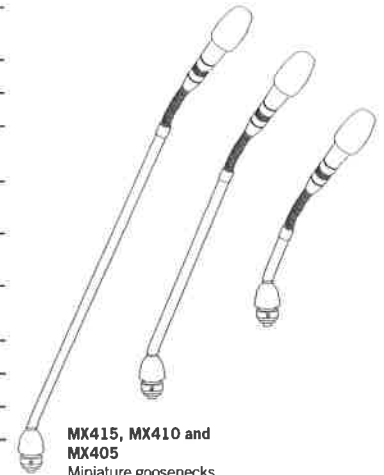

Available Models

The polar pattern of the cartridge is indicated by the model number suffix: C = Cardioid, S = Supercardioid, N = No Cartridge

MX405/C, MX405/S	127 mm (5 inch) gooseneck, bi-color status indicator, includes surface mount preamp
MX405R/N	127 mm (5 inch) gooseneck, light ring, includes surface mount preamp
MX410/C, MX410/S	254 mm (10 inch) gooseneck, bi-color status indicator, includes surface mount preamp
MX410R/N	254 mm (10 inch) gooseneck, light ring, includes surface mount preamp
MX415/C, MX415/S	381 mm (15 inch) gooseneck, bi-color status indicator, includes surface mount preamp
MX415R/N	381 mm (15 inch) gooseneck, light ring, includes surface mount preamp
MX405LP/C, MX405LP/S	127 mm (5 inch) gooseneck, bi-color status indicator, less preamp
MX405RLP/N	127 mm (5 inch) gooseneck, light ring, less preamp
MX410LP/C, MX410LP/S	254 mm (10 inch) gooseneck, cardioid, bi-color status indicator, less preamp
MX410RLP/N	254 mm (10 inch) gooseneck, light ring, less preamp
MX410LPDF/C, MX410LPDF/S	254 mm (10 inch) gooseneck, bi-color status indicator, less preamp, dualflex
MX410RLPDF/C, MX410RLPDF/S	254 mm (10 inch) gooseneck, light ring, less preamp, dualflex
MX410RLPDF/N	254 mm (10 inch) gooseneck, light ring, less preamp, dualflex
MX415LP/C, MX415LP/S	381 mm (15 inch) gooseneck, cardioid, bi-color status indicator, less preamp
MX415RLP/N	381 mm (15 inch) gooseneck, light ring, less preamp
MX415LPDF/C, MX415LPDF/S	381 mm (15 inch) gooseneck, bi-color status indicator, less preamp, dualflex
MX415RLPDF/C, MX415RLPDF/S	381 mm (15 inch) gooseneck, light ring, less preamp, dualflex
MX415RLPDF/N	381 mm (15 inch) gooseneck, light ring, less preamp, dualflex

6. MICROFONOS DE ATRIL

- **SHURE MX SERIES FLEXO**





MX405, MX410 and MX415 Miniature Gooseneck Microphones

Optional Accessories and Replacement Parts

MX400SMP	Surface mount preamp	R185B	Black cardioid cartridge for all Microflex models	A412MWS	Metal locking windscreen
MX400DP	Wired desktop base. Includes 6.1 m attached cable	R184B	Black supercardioid cartridge for all Microflex models	95A2487	Tapered windscreen
MX890	Wireless desktop base, compatible with SLX Wireless Systems	R183B	Black Omnidirectional cartridge for all Microflex models		

Furnished Accessories

Models with included Preamp	All Models
MX400SMP	Surface mount preamp
65A405	Rubber isolation rings
65A2190	Wing nut
95A2529	5-pin XLR-F
65A2166	Cap

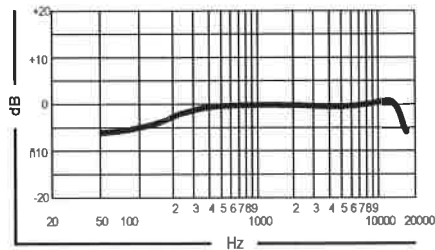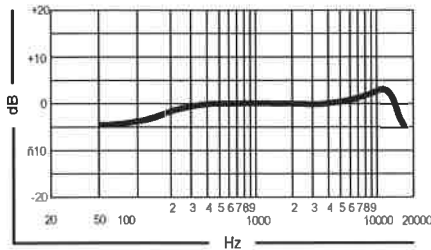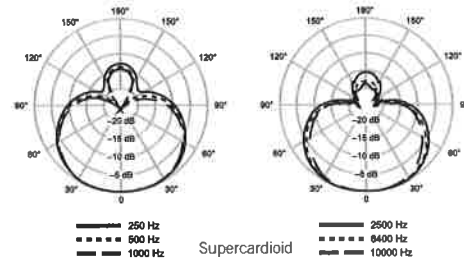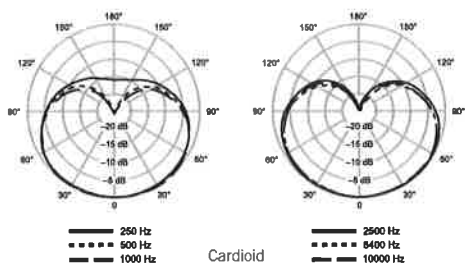

Architectural Specifications

MX405/C – The microphone shall be an electret condenser 127 mm gooseneck microphone (5") with cardioid polar pattern, black finish, and logic controlled bi-color status indicator. The microphone shall be mounted in the included MX400SMP preamp. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 18 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX405/S – The microphone shall be an electret condenser 127 mm gooseneck microphone (5") with supercardioid polar pattern, black finish, and logic controlled bi-color status indicator. The microphone shall be mounted in the included MX400SMP preamp. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX405/R/N – The microphone shall be an electret condenser 127 mm gooseneck microphone (5") with no included cartridge, black finish, and logic controlled, upper red light ring status indicator. The microphone shall be mounted in the included MX400SMP preamp. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX410/C – The microphone shall be an electret condenser 254 mm gooseneck microphone (10") with cardioid polar pattern, black finish, and logic controlled bi-color status indicator. The microphone shall be mounted in the included MX400SMP preamp. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 18 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX410/S – The microphone shall be an electret condenser 254 mm gooseneck microphone (10") with supercardioid polar pattern, black finish, and logic controlled bi-color status indicator. The microphone shall be mounted in the included MX400SMP preamp. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX410/R/N – The microphone shall be an electret condenser 254 mm gooseneck microphone (10") with no included cartridge, black finish, and logic controlled, upper red light ring status indicator. The microphone shall be mounted in the included MX400SMP preamp. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX412 and MX418 Standard Gooseneck Microphones

Microflex Standard Gooseneck Microphones provide the added length and flexibility needed for speakers in environments like lecterns, pulpits, and courtrooms. Available in four models with a variety of lengths and mounting styles to choose from, Microflex Gooseneck microphones feature high sensitivity and balanced, transformerless output for maximum resistance to electromagnetic hum and RF interference, even over long cable runs.


Specifications

Type	Condenser (electret bias)
Frequency Response	50 Hz – 17 kHz
Polar Pattern	MX412/C, MX418/C: Cardioid MX412/S, MX418/S: Supercardioid Omnidirectional cartridge available separately
Output Impedance	EIA rated at 150 Ω (170 Ω actual)
Sensitivity at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL	Cardioid: -35 dBV/Pa (17.8 mV) Supercardioid: -33.5 dBV/Pa (21.1 mV) Omnidirectional: -27.5 (42.2 mV)
Maximum SPL 1 kHz at 1% THD, 1 kΩ load	Cardioid: 124.2 dB Supercardioid: 122.7 dB Omnidirectional: 116.7 dB
Equivalent Output Noise A-weighted	Cardioid: 28 dB SPL Supercardioid: 26.5 dB SPL Omnidirectional: 20.5 dB SPL
Signal-to-Noise Ratio referenced at 94 dB SPL at 1 kHz	Cardioid: 66 dB Supercardioid: 67.5 dB Omnidirectional: 73.5 dB
Dynamic Range 1 kΩ load at 1 kHz	96.2 dB 100 dB at 0 gain (internal modification)
Common Mode Rejection	45 dB minimum (10 Hz – 100 kHz)
Preamp Output Clipping Level 1% THD	-6 dBV (0.5 V)
Polarity	Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector.
Mute Switch Attenuation	-50 dB minimum
Cable	MX412D and MX418D: The 3 m attached custom cable contains a shielded audio pair and three unshielded conductors for logic control. Overall diameter = 4 mm
Environmental Conditions	Operating temperature range: -18° – 57° C Relative humidity: 0 – 95%
Power Requirements	11 – 52 Vdc phantom, 8.0 mA

*for detailed dimensions please reference MX412/418 user guides



MX418
Gooseneck with attached preamp and shockmount

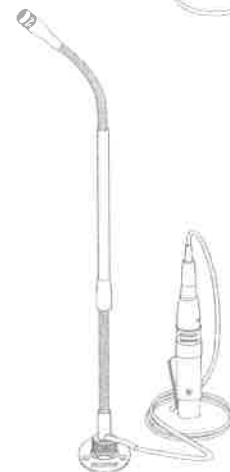

MX418SE
Gooseneck with in-line preamp and side exit cable



MX412D
Gooseneck with attached desktop base

Available Models

The polar pattern of the cartridge is indicated by the model number suffix: C = Cardioid, S = Supercardioid, N = No Cartridge

MX412/C, MX412/S, MX412/N	305 mm (12 inch) gooseneck, attached XLR preamp, shock mount, flange mount, snap-fit foam windscreen
MX418/C, MX418/S, MX418/N	457 mm (18 inch) gooseneck, attached XLR preamp, shock mount, flange mount, snap-fit foam windscreen
MX412S/C, MX412S/S, MX412S/N	305 mm (12 inch) gooseneck, attached XLR preamp, Shock Mount, flange mount, snap-fit foam windscreen, mute switch, LED indicator
MX418S/C, MX418S/S, MX418S/N	457 mm (18 inch) gooseneck, attached XLR preamp, shock mount, flange mount, snap-fit foam windscreen, mute switch, LED indicator
MX412SE/C, MX412SE/S, MX412SE/N	305 mm (12 inch) gooseneck, in-line preamp, shock mount, flange mount, 3 m side-exit (or bottom-exit) cable, snap-fit foam windscreen
MX418SE/C, MX418SE/S, MX418SE/N	457 mm (18 inch) gooseneck, in-line preamp, shock mount, flange mount, 3 m side-exit (or bottom-exit) cable, snap-fit foam windscreen
MX412D/C, MX412D/S, MX412D/N	305 mm (12 inch) gooseneck, desktop base with 3 m cable, logic functions, programmable switch and LED indicator, snap-fit foam windscreen
MX418D/C, MX418D/S, MX418D/N	457 mm (18 inch) gooseneck, desktop base with 3 m cable, logic functions, programmable switch and LED indicator, snap-fit foam windscreen




MX412 and MX418 Standard Gooseneck Microphones

Furnished Accessories

MX412, MX418, MX412S, MX418S Models		MX412SE, MX418SE Models		MX412D, MX418D Models	
65B8264	Flange	A12C	Flange and nut	RK412WS	Snap-fit foam windscreens (1 furnished, 4 in replacement pack)
65B8265	Retainer	80A476	Clamp		
80A439	Isolation ring	A400SM	Shock mount		
RK412WS	Snap-fit foam windscreens (1 furnished, 4 in replacement pack)	RK412WS	Snap-fit foam windscreens (1 furnished, 4 in replacement pack)		
A400SM	Shock mount	31B1762A	Shock mount adapter		
80A67	Hex wrench #4				

Optional Accessories and Replacement Parts

A99WS	Foam ball windscreens	R183B	Black omnidirectional cartridge for all Microflex models	A412MWS	Metal locking windscreens
RK100PK	Replacement in-line preamplifier (SE models)	R184B	Black supercardioid cartridge for all Microflex models	A412B	Desktop base
C130	Custom logic cable (specify length)	R185B	Black cardioid cartridge for all Microflex models	A57F	Stand adapter

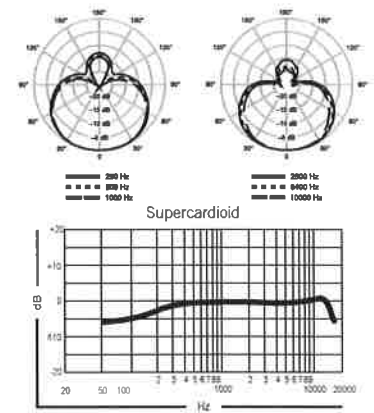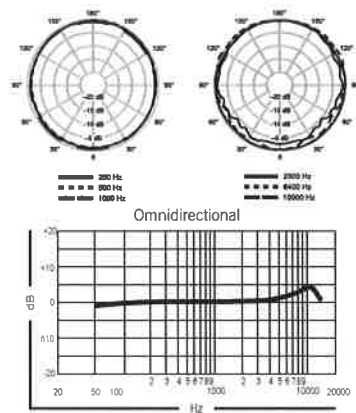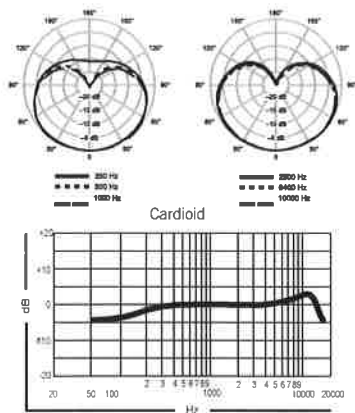

MX396 Multi-Element Boundary Microphones

Microflex Multi-Element Boundary Microphones deliver a unique and versatile tool for conference room installations. Clean and simple in appearance, Multi-Element Boundary mics come in two or three element configurations, combining the coverage of multiple microphones into one small, compact package.

Specifications

Type	Condenser (electret bias)
Frequency Response	50 Hz – 17 kHz
Output Impedance	EIA rated at 150 Ω (170 Ω actual)
Output Configuration	Active balanced
Sensitivity at 1 kHz, open circuit voltage; 1 Pa = 94 dB SPL	-35 dBV/Pa (18 mV)
Maximum SPL 1 kHz at 1% THD, 1 kΩ load	122 dB
Equivalent Output Noise A-weighted	28 dB SPL
Signal-to-Noise Ratio referenced at 94 dB SPL at 1 kHz	66 dB
Dynamic Range 1 kΩ load at 1 kHz	94 dB
Common Mode Rejection 10 Hz to 100 kHz	45 dB minimum
Preamplifier Output Clipping Level 1% THD	-6 dBV (0.5 V)
Weight	Net: 587 g Packaged: 816 g
Logic Connections	LED IN: Active low (≤ 1.0 V), sinks up to 20 mA, TTL compatible. Absolute maximum voltage: -0.7 V to 50 V (up to 50 V through 3 kΩ) LOGIC OUT: Active low (≤ 1.0 V), sinks up to 20 mA, TTL compatible. Absolute maximum voltage: -0.7 V to 50 V (up to 50 V through 3 kΩ).
Mute Switch Attenuation	-50 dB minimum
Cable	6 m attached unterminated cable with three shielded audio pairs and three shielded conductors for logic control.
Environmental Conditions	Operating temperature: -18 – 57 °C Storage temperature: -29 – 74 °C Relative humidity: 0 – 95%
Power Requirements	MX396/C-DUAL: 48 – 52 Vdc phantom, 10.0 mA MX396/C-TRI: 48 – 52 Vdc phantom, 12.0 mA

Available Models

MX396/C-DUAL	Dual-Element 0-180 degrees, back or bottom exit cable, mute output, LED input
MX396/C-TRI	Tri-Element 90-0-90 mic, adjustable to 120-120-120 degrees, back or bottom exit cable, mute output, LED input

Furnished Accessories and Replacement Parts

65A2190	Fastening wingnut	R185B	Cardioid replacement cartridge (x 1)
31A2165	Fastening tube	65A405	Rubber isolation rings




Architectural Specifications

MX396/C-Dual – The microphone shall be a surface mounted, black electret condenser microphone with two cardioid polar pattern elements, each with individual channel output. The microphone shall include a logic enabled, bi-color status indicator and programmable mute switch. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency range shall be 50 Hz to 17 kHz and the sensitivity of each individual element, 18 mV/Pa.


MX396/C-Tri – The microphone shall be a surface mounted, black electret condenser microphone with three cardioid polar pattern elements, each with individual channel output. The microphone shall include a logic enabled, bi-color status indicator and programmable mute switch. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency range shall be 50 Hz to 17 kHz and the sensitivity of each individual element, 18 mV/Pa.



MX396 Multi-Element boundary microphone

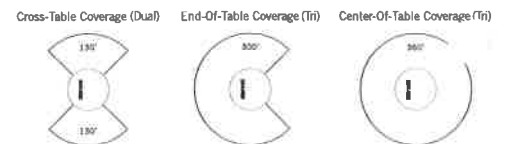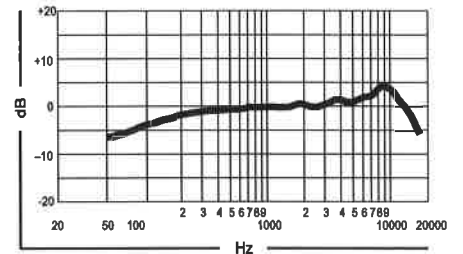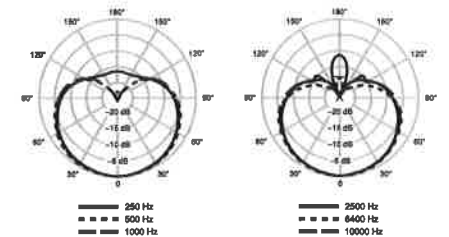

Example of Boardroom Table Mic Placement Coverage




MX395 Low Profile Boundary Microphones

The Microflex Low Profile Boundary Microphone is an ideal table microphone when minimal presence is of high priority. Perfect for meeting rooms, these microphones deliver exceptional sound pickup while barely being noticed. Choose from a selection of colors and pickup patterns for customized table and ceiling installations.

Specifications

Type	Condenser (electret bias)
Frequency Response	50 Hz – 17 kHz
Polar Pattern	MX395/O: Omnidirectional MX395/C: Cardioid MX395/BI: Bidirectional
Output Impedance	EIA rated at 150 Ω (170 Ω actual)
Output Configuration	Active balanced
Sensitivity at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL	Cardioid: -35 dBV/Pa (18 mV) Omnidirectional: -28 dBV/Pa (42 mV) Bidirectional: -37 dBV/Pa (14 mV)
Maximum SPL 1 kHz at 1% THD, 1 kΩ load	Cardioid: 121 dB Omnidirectional: 114 dB Bidirectional: 123 dB
Equivalent Output Noise A-weighted	Cardioid: 28 dB SPL Omnidirectional: 21 dB SPL Bidirectional: 29 dB
Signal-to-Noise Ratio referenced at 94 dB SPL at 1 kHz	Cardioid: 66 dB Omnidirectional: 73 dB Bidirectional: 65 dB
Dynamic Range 1 kΩ load at 1 kHz	Cardioid: 93 dB Omnidirectional: 93 dB Bidirectional: 94 dB
Common Mode Rejection	45 dB minimum 10 Hz to 100 kHz
Preamplifier Output Clipping Level 1% THD	-8 dBV (0.4 V)
Polarity	3-pin XLR: Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector. 5-pin XLR: Positive sound pressure on diaphragm produces positive voltage on pin 4 relative to pin 2 of output XLR connector.
Weight	Net: 136 g; Packaged: 374 g
Logic Connections	LED IN: Active low (≤ 1.0 V), TTL compatible. Absolute maximum voltage: -0.7 V to 50 V.
Environmental Conditions	Operating temperature: -18 – 57 °C Storage temperature: -29 – 74 °C Relative humidity: 0 – 95%
Power Requirements	MX395: 11 – 52 Vdc phantom, 2.0 mA MX395-LED: 48 – 52 Vdc phantom, 8.0 mA

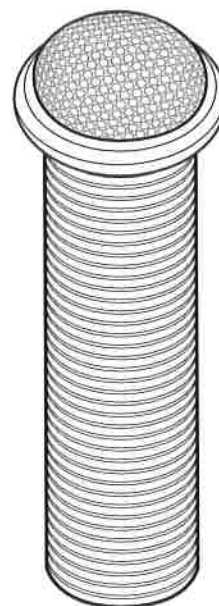

MX395
Low Profile
Boundary Mic

Available Models

The polar pattern of the cartridge is indicated by the model number suffix: C = Cardioid, O = Omnidirectional, BI = Bidirectional

MX395B/C, MX395B/BI, MX395B/O	Black, 3-pin XLR
MX395AL/C, MX395AL/BI, MX395AL/O	Aluminum, 3-pin XLR
MX395W/C, MX395W/BI, MX395W/O	White, 3-pin XLR
MX395B/C-LED, MX395B/BI-LED, MX395B/O-LED	Black, 5-pin XLR, LED, bi-color status indicator
MX395AL/C-LED, MX395AL/BI-LED, MX395AL/O-LED	Aluminum, 5-pin XLR, LED, bi-color status indicator
MX395W/C-LED, MX395W/BI-LED, MX395W/O-LED	White, 5-pin XLR, LED, bi-color status indicator

MX690 Wireless Boundary and MX890 Wireless Desktop Base

The Microflex Wireless Boundary Microphone as well as the Wireless Desktop Base offer total freedom of placement with no holes to drill or cables to run for installation. They are the perfect solution for conference and meeting spaces where users demand flexibility and high performance. Compatible with Shure SLX Wireless Systems, including the SLX4L receiver with logic signal output for applications requiring logic functionality.

Specifications



MX690 Microphone Specifications

Type	Condenser (electret bias)
Frequency Response	50 Hz – 17 kHz
Polar Pattern	Cardioid
Sensitivity at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL	-33 dBV/Pa (22 mV)
Dynamic Range	96 dB 1 kΩ load at 1 kHz
Common Mode Rejection	45 dB minimum 10 Hz to 100 kHz
Preamp Output Clipping Level 1% THD	-6 dBV (0.5 V)
Polarity	Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector or tip of 1/4" phone plug (both on SLX4 or SLX4L wireless receiver).

MX690 and MX890 Transmitter Specifications

RF Power	10 mW
Operating Range	30 m Note: Actual range depends on RF signal absorption, reflection, and interference
Frequency Stability	±10 ppm
Maximum Frequency Deviation	45 kHz
Oscillator Type	Phase-locked loop (PLL) controlled synthesizer
Power Requirements	3 V (2 AA alkaline or rechargeable batteries)
Battery Life	≥8 hours (alkaline)
Power Consumption	130 mA, ± 15 mA
Operating Temperature Range	-18 – 57 °C Note: Battery may limit this range
Dimensions (H x W x L)	43 mm x 87 mm x 148 mm
Weight	MX690 Net: 318 g MX890 Net: 312 g Packaged: 516 g Packaged: 530 g

MX690 Net: 318 g (11,2 oz)

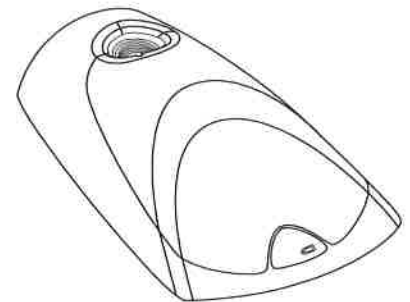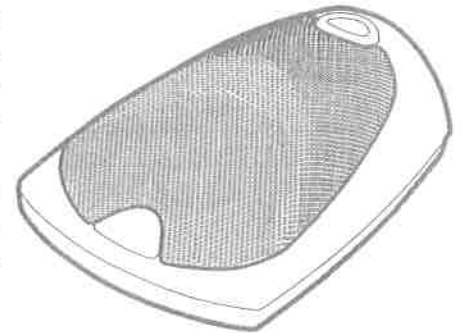

MX890
Wireless Desktop Base

Available Models

MX690	Wireless boundary microphone, cardioid, mute switch
MX890	Wireless desktop base for MX405 and MX410 models, mute switch



Optional Accessories

SLX4	Wireless diversity receiver	SLX4L	Wireless diversity receiver with logic output
-------------	-----------------------------	--------------	---

Architectural Specifications

MX690 – The microphone shall be a surface mounted, black condenser microphone with a cardioid polar pattern. The microphone shall include a bi-color LED status indicator and a programmable mute switch. The microphone shall have an integrated wireless transmitter for audio signals with switchable carrier frequencies as well as preprogrammed groups up to 12 compatible channels. An infrared signal shall be used to synchronize the frequency between transmitter and receiver. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency range shall be 50 Hz to 17 kHz and the sensitivity shall be 22 mV/Pa.

MX890 – The wireless desk stand shall be a transmitter base for audio signals with switchable carrier frequencies as well as preprogrammed groups with up to 12 compatible channels. An infrared signal shall be used to synchronize the frequency between transmitter and receiver. The wireless desktop base shall be used with the MX405 and MX410 series gooseneck microphones and shall feature a programmable mute switch.

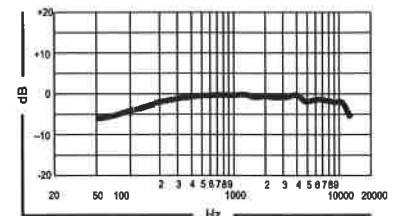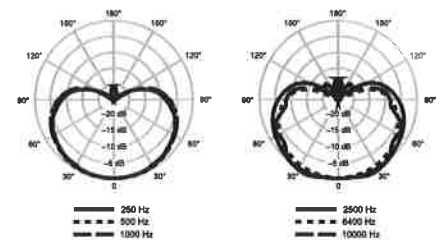

MX202 Overhead Microphones

Easily hung from ceilings, Microflex Overhead Microphones capture sound from speakers, choirs, stages, and more conveniently and unobtrusively from above. Compact and flexible, overhead microphones each feature a 10 cm (4") gooseneck, multiple preamp options for easy installation into ceilings or microphone stands, and versatile condenser cartridges for accurate sound reproduction in any setting.


Specifications

Type	Condenser (electret bias)
Frequency Response	50 Hz – 17 kHz
Polar Pattern	MX202/C: Cardioid MX202/O: Omnidirectional MX202/S: Supercardioid
Output Impedance	150 Ω rated at EIA (180 Ω actual)
Sensitivity (at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL)	Cardioid: -35.0 dBV/Pa (17.8 mV) Supercardioid: -33.5 dBV/Pa (21.1 mV) Omnidirectional: -27.5 dBV/Pa (42.2 mV)
Maximum SPL (1 kHz at 1% THD, 1 kΩ load; All values +6 dB at 0 gain)	Cardioid: 124.2 dB Supercardioid: 122.7 dB Omnidirectional: 116.7 dB
Equivalent Output Noise A-weighted	Cardioid: 28.0 dB SPL Supercardioid: 26.5 dB SPL Omnidirectional: 20.5 dB SPL
Signal to Noise Ratio (referenced at 94 dB SPL)	Cardioid: 66.0 dB Supercardioid: 67.5 dB Omnidirectional: 73.5 dB
Dynamic Range 1 kΩ load at 1 kHz	96.2 dB 100 dB at 0 gain (internal modification)
Common Mode Rejection 10 Hz to 100 kHz	45 dB minimum
Preamplifier Output Clipping Level 1% THD	-6 dBV (0.5 V)
Polarity	Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output connector.
Power Requirements	11 – 52 Vdc phantom, 2.0 mA
Environmental Requirements	Operating temperature range: -18° C – 57° C Relative humidity: 0 – 95%

Available Models

The polar pattern of the cartridge is indicated by the model number suffix: C = Cardioid, S = Supercardioid, N = No Cartridge

MX202B/C, MX202B/S, MX202B/N	Black mini-condenser microphone; includes cable, in-line preamplifier, and stand adapter
MX202W/C, MX202W/S, MX202W/N	White mini-condenser microphone; includes cable, in-line preamplifier, and stand adapter
MX202BP/C, MX202BP/S, MX202BP/N	Black mini-condenser microphone; includes cable and plate-mounted preamplifier
MX202WP/C, MX202WP/S, MX202WP/N	White mini-condenser microphone; includes cable and plate-mounted preamplifier

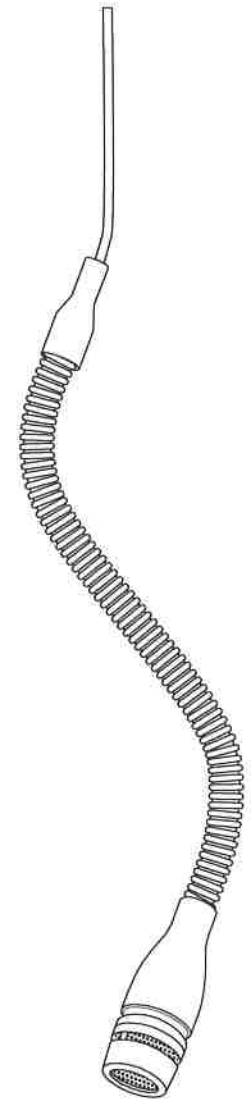

MX202
Overhead Microphone

MX202 Overhead Microphones

Furnished Accessories

RK183WS (Black) 95B2064 (White)	Black snap-fit foam windscreen White snap-fit foam windscreen	65B1752	Stand adapter (MX202B)
RK202PK	Preamplifier kit, plate mounted, White (MX202BP & MX202WP)	RK100PK/ RK100PKW	In-line preamplifier (MX202W & MX202B)
80A476	Clamp (MX202B & MX202WP)	80B489	Hang clip

Optional Accessories and Replacement Parts

A202BB	Desk stand	R183B (Black) R183W (White)	Omnidirectional cartridge for all Microflex models
80A479	Strain relief (MX202BP & MX202WP)	R184B (Black) R184W (White)	Supercardioid cartridge for all Microflex models
A57F	Stativ adapter (MX202B)	R185B (Black) R185W (White)	Cardioid cartridge for all Microflex models

Architectural Specifications

MX202B/C – The microphone shall be an electret condenser overhead microphone with a cardioid polar pattern, 10 cm gooseneck, in-line preamplifier, and black finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 17.8 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX202B/S – The microphone shall be an electret condenser overhead microphone with a supercardioid polar pattern, 10 cm gooseneck, in-line preamplifier, and black finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21.1 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX202B/N – The microphone shall be an electret condenser overhead microphone with no included cartridge, 10 cm gooseneck, in-line preamplifier, and black finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX202W/C – The microphone shall be an electret condenser overhead microphone with a cardioid polar pattern, 10 cm gooseneck, in-line preamplifier, and white finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 17.8 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX202W/S – The microphone shall be an electret condenser overhead microphone with a supercardioid polar pattern, 10 cm gooseneck, in-line preamplifier, and white finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21.1 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX202W/N – The microphone shall be an electret condenser overhead microphone with no included cartridge, 10 cm gooseneck, in-line preamplifier, and white finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX202BP/C – The microphone shall be an electret condenser overhead microphone with a cardioid polar pattern, 10 cm gooseneck, a plate-mounted preamplifier, and black finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 17.8 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.







MX202BP/S – The microphone shall be an electret condenser overhead microphone with a supercardioid polar pattern, 10 cm gooseneck, a plate-mounted preamplifier, and black finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21.1 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX202BP/N – The microphone shall be an electret condenser overhead microphone with no included cartridge, 10 cm gooseneck, a plate-mounted preamplifier, and black finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX202WP/C – The microphone shall be an electret condenser overhead microphone with a cardioid polar pattern, 10 cm gooseneck, a plate-mounted preamplifier, and white finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 17.8 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX202WP/S – The microphone shall be an electret condenser overhead microphone with a supercardioid polar pattern, 10 cm gooseneck, a plate-mounted preamplifier, and white finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21.1 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

MX202WP/N – The microphone shall be an electret condenser overhead microphone with no included cartridge, 10 cm gooseneck, a plate-mounted preamplifier, and white finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

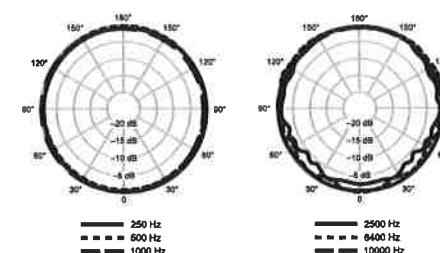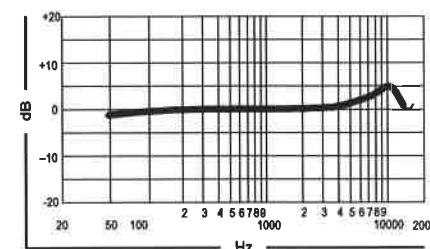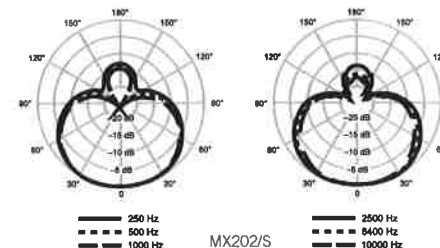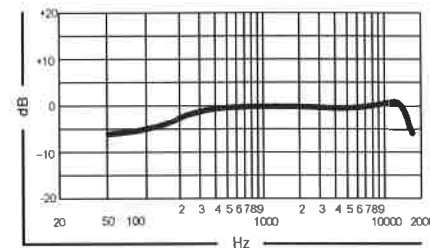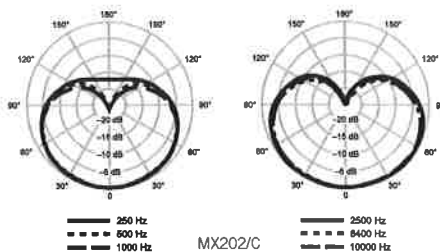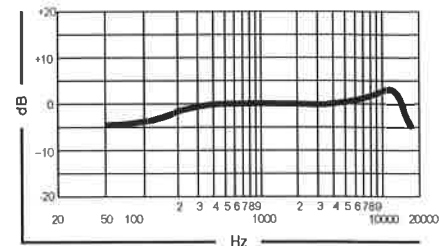

MX391, MX392, MX393 Boundary Microphones


With slim design and superior audio reproduction, Microflex Boundary Microphones are the ideal conference room solution. Equipped with features like programmable, silent membrane switches, interchangeable cartridges, logic inputs and outputs, and LED indicators, Microflex Boundary microphones provide high-quality sound for a wide range of applications.

Specifications

Type	Condenser (electret bias)	
Frequency Response	50 Hz – 17 kHz	
Polar Pattern	MX391/C, MX392/C, MX393/C: Cardioid MX391/S, MX392/S, MX393/S: Supercardioid MX391/O, MX392/O, MX393/O: Omnidirectional	
Output Impedance	EIA rated at 150 Ω (180 Ω actual)	
Logic Connections (MX392 Only)	LED IN: Active low (≤ 1.0 V), TTL compatible. Absolute maximum voltage: -0.7 V to 50 V. SWITCH OUT: Active low (≤ 0.5 V), sinks up to 20 mA, TTL compatible. Absolute maximum voltage: -0.7 V to 50 V (up to 50 V through 3 kΩ).	
Environmental Conditions	Operating temperature range: -18° C – 57° C Relative Humidity: 0 – 95%	
Power Requirements	11 – 52 Vdc phantom, 2.0 mA	
	MX391	MX392/MX393
Sensitivity (at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL); All settings -12 dB at 0 gain (internal modification)	Cardioid: -29.5 dB (33.5 mV) Supercardioid: -28.3 dB (38.5 mV) Omnidirectional: -21.8 dB (81.4 mV)	Cardioid: -27.5 dBV/Pa (42.2 mV) Supercardioid: -26.5 dBV/Pa (47.3 mV) Omnidirectional: -22.0 dBV/Pa (79.4 mV)
Maximum SPL 1 kHz at 1% THD, 1 kΩ load; All settings +6 dB at 0 gain (internal modification)	Cardioid: 118.8 dB Supercardioid: 117.5 dB Omnidirectional: 110.7 dB	Cardioid: 117.0 dB Supercardioid: 116.0 dB Omnidirectional: 111.5 dB
Equivalent Output Noise A-weighted	Cardioid: 22.6 dB SPL Supercardioid: 21.3 dB SPL Omnidirectional: 14.5 dB SPL	Cardioid: 23.0 dB Supercardioid: 22.0 dB Omnidirectional: 17.5 dB
Signal-to-Noise Ratio referenced at 94 dB SPL at 1 kHz	Cardioid: 71.4 dB Supercardioid: 72.7 dB Omnidirectional: 79.5 dB	Cardioid: 71.0 dB Supercardioid: 72.0 dB Omnidirectional: 76.5 dB
Dynamic Range 1 kΩ load at 1 kHz	96.2 dB	94.0 dB
Common Mode Rejection 10 Hz to 100 kHz	45 dB minimum, 10 Hz to 100 kHz	45 dB minimum, 10 Hz to 100 kHz
Preamplifier Output Clipping Level 1% THD	-6 dBV (0.5 V)	-6 dBV (0.5 V)
Polarity	Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of the preamplifier XLR output	Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output connector (MX393) or red wire relative to black wire (MX392).



MX391
Boundary microphone

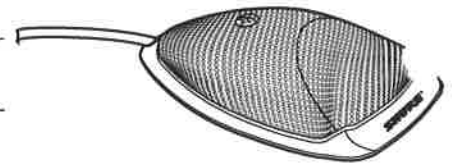

MX392/ MX393
Boundary microphone

Available Models

The polar pattern of the cartridge is indicated by the model number suffix: C = Cardioid, O = Omnidirectional, S = Supercardioid

MX391/C, MX391/S, MX391/O	Black surface-mount microphone, attached 3.7 m cable terminated, 4-pin mini connector, separate preamplifier
MX391W/C, MX391W/S, MX391W/O	White surface-mount microphone, attached 3.7 m cable terminated, 4-pin mini connector, separate preamplifier
MX392/C, MX392/S, MX392/O	Surface-mount microphone, programmable membrane on/off switch, logic input/output terminals, on/off indicator LED, screw terminal connections, attached 3.7 m unterminated cable
MX393/C, MX393/S, MX393/O	Surface-mount microphone, programmable membrane on/off switch, on/off indicator LED, miniature three pin connector, and detachable 3.7 m cable.







MX391, MX392, MX393 Boundary Microphones

Furnished Accessories

95B2313	Zipper bag	80A541	Switch paint mask (MX392/MX393)
80C514	Paint mask (MX392/MX393)	36A664	Paint plug (MX392/MX393)
RK100PK	In-line preamp (MX391/MX391W)		

Optional Accessories and Replacement Parts

R183B	Omnidirectional cartridge for all Microflex models	C129	3,7 m cable 3-pin miniature connector (TA3F) to male XLR (MX393)
R184B	Supercardioid cartridge for all Microflex models	C130	Custom-logic cable with threaded adapter
R185B	Cardioid cartridge for all Microflex models	15A525	Custom logic cable (specify length)

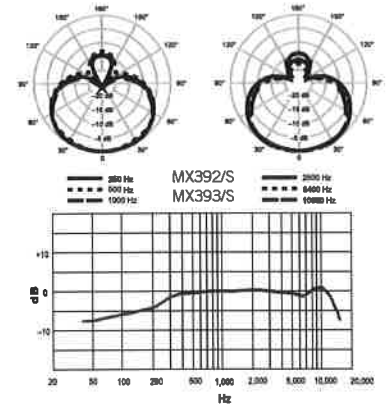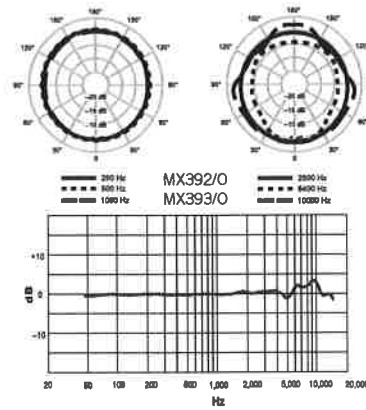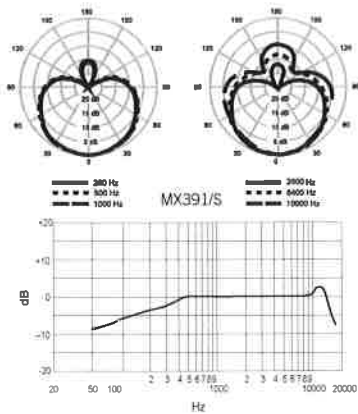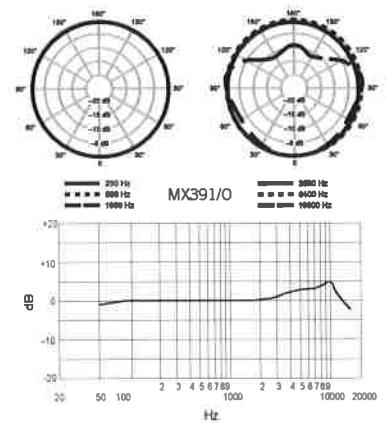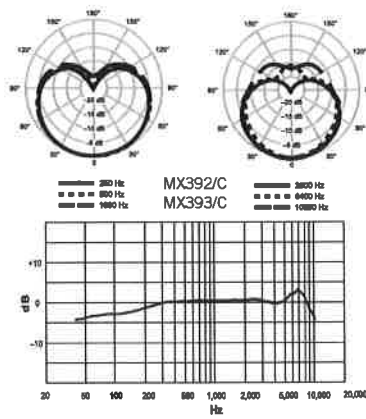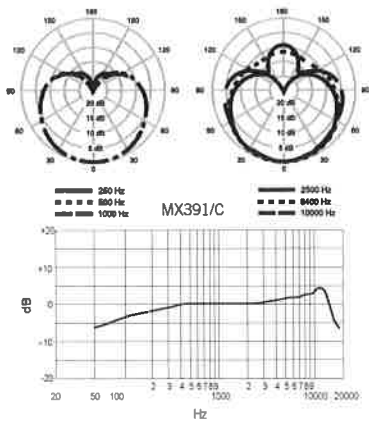

MX391, MX392, MX393 Boundary Microphones

Architectural Specifications

MX391/C – The microphone shall be a surface mounted, black electret condenser microphone with a cardioid polar pattern, a 3.7 m cable terminated with a 4-pin mini connector, and in-line preamplifier. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 33.5 mV/Pa.

MX391/S – The microphone shall be a surface mounted, black electret condenser microphone with a supercardioid polar pattern, a 3.7 m cable terminated with a 4-pin mini connector, and in-line preamplifier. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 38.5 mV/Pa.

MX391/O – The microphone shall be a surface mounted, black electret condenser microphone with an omnidirectional polar pattern, a 3.7 m cable terminated with a 4-pin mini connector, and in-line preamplifier. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 81.4 mV/Pa.

MX391/W/C – The microphone shall be a surface mounted, white electret condenser microphone with a cardioid polar pattern, a 3.7 m cable terminated with a 4-pin mini connector, and in-line preamplifier. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 33.5 mV/Pa.

MX391/W/S – The microphone shall be a surface mounted, white electret condenser microphone with a supercardioid polar pattern, a 3.7 m cable terminated with a 4-pin mini connector, and in-line preamplifier. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 38.5 mV/Pa.

MX391/W/O – The microphone shall be a surface mounted, white electret condenser microphone with an omnidirectional polar pattern, a 3.7 m cable terminated with a 4-pin mini connector, and in-line preamplifier. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 81.4 mV/Pa.

MX392/C – The microphone shall be a surface mounted, black electret condenser microphone with a cardioid polar pattern, programmable membrane on/off switch, and logic controlled LED indicator. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 42.2 mV/Pa.

MX392/S – The microphone shall be a surface mounted, black electret condenser microphone with a supercardioid polar pattern, programmable membrane on/off switch, and logic controlled LED indicator. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 47.3 mV/Pa.

MX392/O – The microphone shall be a surface mounted, black electret condenser microphone with an omnidirectional polar pattern, programmable membrane on/off switch, and logic controlled LED indicator. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 79.4 mV/Pa.

MX393/C – The microphone shall be a surface mounted, black electret condenser microphone with a cardioid polar pattern, programmable membrane on/off switch with LED indicator. The microphone shall include a removable 3.7 m cable, connected to the microphone through a TA3F connector and which terminates to a XLR connector. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 42.2 mV/Pa.

MX393/S – The microphone shall be a surface mounted, black electret condenser microphone with a supercardioid polar pattern, programmable membrane on/off switch with LED indicator. The microphone shall include a removable 3.7 m cable, connected to the microphone through a TA3F connector and which terminates to a XLR connector. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 47.3 mV/Pa.


MX393/O – The microphone shall be a surface mounted, black electret condenser microphone with an omnidirectional polar pattern, programmable membrane on/off switch with LED indicator. The microphone shall include a removable 3.7 m (12") cable, connected to the microphone through a TA3 connector and which terminates to a XLR connector. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 79.4 mV/Pa.

MX150 Subminiature Condenser Lavalier Microphone

The Shure Microflex MX150 is a professional subminiature electret condenser lavalier microphone ideal for use in speech and other applications requiring low profile, discreet placement. Available with cardioid or omnidirectional patterns, the MX150 provides uncompromised sound quality and high reliability with minimal visibility for use in television broadcasting, corporate and educational lectures, AV teleconferencing, and sound reinforcement.

Features

- Available in cardioid or omnidirectional polar patterns and TQG/TA4F (for use in Shure bodypacks) or wired XLR variations
- CommShield® technology guards against interference from cellular RF devices and digital bodypack transmitters
- Matte black, sleek, low-profile, design for inconspicuous placement
- Multi-position tie clip allows for a variety of placement options and features an integrated cable management system for convenient cable dress with minimized handling noise.
- Kevlar-reinforced soft-flex cable design further reduces handling noise while providing superior flexibility for routing and placement
- User-changeable equalization caps for response shaping (omnidirectional only)
- Snap-fit, concise windscreens provides protection from plosives and wind noise with minimal visibility
- Legendary Shure quality, ruggedness, and reliability





MX150 with tie clip and windscreen

Available Models


MX150B/O-TQG	Microflex subminiature condenser lavalier microphone, omnidirectional, TQG connector
MX150B/C-TQG	Microflex subminiature condenser lavalier microphone, cardioid, TQG connector
MX150B/O-XLR	Microflex subminiature condenser lavalier microphone, omnidirectional, XLR connector
MX150B/C-XLR	Microflex subminiature condenser lavalier microphone, cardioid, XLR connector

Specifications

	MX150/C	MX150/O
Transducer Type	Electret condenser	Electret condenser
Polar Pattern	Cardioid	Omnidirectional
Frequency Response	20 – 20 kHz	20 – 20 kHz
Output Impedance	TQG: N/A, XLR: 165.5 Ω	TQG: N/A, XLR: 165.0 Ω
Sensitivity open circuit voltage, @ 1 kHz, typical	TQG: -51.0 dBV/Pa (3.0 mV) XLR: -39.0 dBV/Pa (11.0 mV)	TQG: -46.5 dBV/Pa (4.5 mV) XLR: -34.5 dBV/Pa (19.0 mV)
Maximum SPL 1 kHz at 1% THD, 2500 Ω Load	TQG: 147.5 dB SPL XLR: 134.5 dB SPL	TQG: 143.0 dB SPL XLR: 130 dB SPL
Signal-to-Noise Ratio	TQG: 57.5 dB XLR: 57.0 dB	TQG: 60.0 dB XLR: 59.5 dB
Clipping Level 1 kHz at 1% THD, 2500 Ω Load	TQG: 2.0 dBV XLR: 1.0 dBV	TQG: 2.0 dBV XLR: 1.0 dBV
Common Mode Rejection 20 Hz – 20 kHz	TQG: N/A XLR: ≥60 dB	TQG: N/A XLR: ≥60 dB
Dynamic Range @ 1 kHz, 2500 Ω Load	TQG: 111.0 dB SPL XLR: 97.5 dB SPL	TQG: 109.0 dB SPL XLR: 95.5 dB SPL
Self Noise equivalent SPL, A-weighted, typical	TQG: 36.5 dB XLR: 37.0 dB	TQG: 34.0 dB XLR: 34.5 dB
Operating Temperature Range	-18°C to 57°C	-18°C to 57°C
Polarity	TQG: Positive pressure on diaphragm produces positive voltage on pin 3 with respect to pin 1 XLR: Positive pressure on diaphragm produces positive voltage on pin 2 with respect to pin 3	
Power Requirements	TQG: 5 V DC (0.04 – 0.18 mA) XLR: 11-52 V DC phantom power (IEC-61938), < 2.2 mA	TQG: 5 V DC (0.04 – 0.18 mA) XLR: 11-52 V DC phantom power (IEC-61938), < 2.2 mA
Cable Length	1.52 m	1.52 m
Weight	TQG: 21 g XLR: 121 g	TQG: 21 g XLR: 121 g




MX150/C Polar Pattern




MX150/O Polar Pattern

Accessories

WA150	Storage pouch for MX150
WA330	TQG/TA4F 4 pin connector
RK100PK	XLR preamp

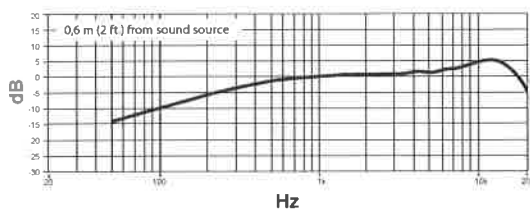

MX150/C Frequency Response

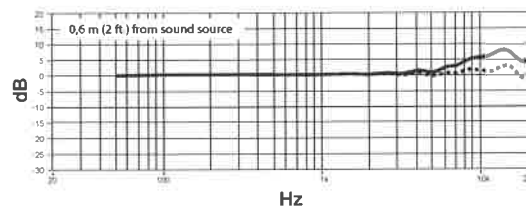

MX150/O Frequency Response


Boost Cap
Normal Cap

MX153 Earset Headworn Microphone

The Shure Microflex MX153 is a professional subminiature earset microphone ideal for speech and other applications requiring low-profile discreet placement where improved gain before feedback over lavalier microphones is desired. Delivering exceptional speech clarity, the MX153 is ideal for corporate and educational presentations, AV conferencing and live sound reinforcement. Available in three color options and direct TA4F connectivity to Shure bodypacks, the MX153 provides outstanding clarity in an extremely comfortable, over the ear design.

Features

- Subminiature, omnidirectional cartridge offers superior speech clarity and enhanced plosive protection with no proximity effect
- Terminated with TQG/TA4F connector for direct connectivity to Shure wireless bodypack transmitters
- Ultra-lightweight, comfortable, flexible design is stable and easy to place over either ear
- CommShield® technology guards against interference from cellular RF devices and digital bodypack transmitters
- Kevlar reinforced, attached soft-flex cable
- Matte black, tan, and cocoa color options available
- Includes protective storage pouch, 3 windscreens, and collar clip

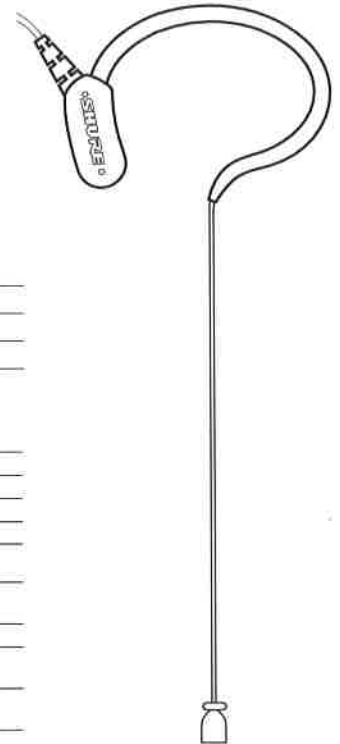

MX153 Earset Headworn Microphone

Available Models

MX153B/O-TQG	Microflex earset headworn condenser microphone, omnidirectional, TQG connector, black
MX153T/O-TQG	Microflex earset headworn condenser microphone, omnidirectional, TQG connector, tan
MX153C/O-TQG	Microflex earset headworn condenser microphone, omnidirectional, TQG connector, cocoa


Specifications

MX153

Transducer Type	Electret condenser
Polar Pattern	Omnidirectional
Frequency Response	20 Hz – 20 kHz
Output Impedance	N/A
Sensitivity open circuit voltage, @ 1 kHz, typical	-41 dBV/Pa (9 mV)
Maximum SPL 1 kHz at 1% THD	2500 Ω load: 107 dB SPL 1000 Ω load: 107 dB SPL
Signal-to-Noise Ratio	60 dB
Dynamic Range @ 1 kHz	2500 Ω load: 73 dB 1000 Ω load: 73 dB
Common Mode Rejection 20 Hz – 20 kHz	N/A
Self Noise equivalent SPL, A-weighted, typical	34 dB
Operating Temperature Range	-18°C – 57°C
Polarity	Positive pressure on diaphragm produces negative voltage on pin 3 with respect to pin 1
Power Requirements	+1-5 V DC (500 μA maximum)
Weight	19.8 g

Accessories

WA150	Storage pouch for MX150
WA330	TQG/TA4F 4 pin connector
RK100PK	XLR preamp

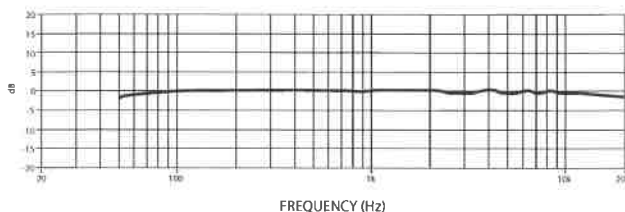

MX183, MX184, MX185 Lavalier Microphones

Attached to a tie or lapel, Microflex Lavalier Microphones offer freedom of movement to any situation involving voice reproduction. As stylish as they are convenient, Lavaliers are available in different directional patterns, come with multiple clip options, and are compatible with all Shure wireless platforms.

Specifications

Type	Condenser (electret bias)
Frequency Response	50 Hz – 17 kHz
Polar Pattern	MX183: Omnidirectional MX184: Supercardioid MX185: Cardioid
Output Impedance	EIA rated at 150 Ω (170 Ω actual)
Sensitivity (at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL; all settings -12 dB at 0 gain)	MX183: -27.5 dB (42.2 mV) MX184: -33.5 dB (21.1 mV) MX185: -35.4 dB (17.0 mV)
Maximum SPL (1 kHz at 1% THD, 1 k Ω load; all settings +6 dB at 0 gain)	MX183: 116.7 dB MX184: 122.7 dB MX185: 124.2 dB
Equivalent Output Noise A-weighted	MX183: 20.5 dB MX184: 26.5 dB MX185: 28.0 dB
Signal-to-Noise Ratio referenced at 94 dB SPL at 1 kHz	MX183: 73.5 dB MX184: 67.5 dB MX185: 66.0 dB
Dynamic Range 1 k Ω load at 1 kHz	96.2 dB 100 dB at 0 gain (internal modification)
Common Mode Rejection 10 Hz to 100 kHz	45 dB minimum
Polarity	Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector.
Environmental Conditions	Operating temperature range: -18° – 57° C Storage temperature range: -29° – 74° C
Power Requirements	11 – 52 Vdc phantom, 2.0 mA
Cable	Shielded 1.2 m cable terminated with a 4-pin female mini connector (TA4F)



MX183/ MX184/ MX185
Lavalier microphone

Available Models

MX183	Omnidirectional, includes belt-clip preamp, rotatable tie clip, dual tie clip, snap-fit windscreen
MX184	Supercardioid, includes belt-clip preamp, rotatable tie clip, dual tie clip, snap-fit windscreen
MX185	Cardioid, includes belt-clip preamp, rotatable tie clip, dual tie clip, snap-fit windscreen

MX183, MX184, MX185 Lavalier Microphones

Furnished Accessories

26A13	Zipper bag	RK183T1	Tie clip
RK261BWS	Foam windscreen	RK183T2	Dual tie clip
RK183WS	Snap-fit windscreen	RK100PK	In-line preamp
80A67	Hex wrench #4		

Optional Accessories and Replacement Parts




R183B	Omnidirectional cartridge for all Microflex models	R184B	Supercardioid cartridge for all Microflex models	R185B	Cardioid cartridge for all Microflex models
MX1BP	Battery powered preamp	53A2133A	Belt clip for in-line preamp	WA333	4-pin female mini connector (TA4F)
C133	Replacement cable, Microphone to preamp				

Architectural Specifications

MX183 – The microphone shall be black electret condenser lavalier microphone with an omnidirectional polar pattern, in-line belt-clip preamp, and 1.2 m cable that terminates with a 4-pin miniature (TA4F) connector. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 42.4 mV/Pa.

MX184 – The microphone shall be a black electret condenser lavalier microphone with a supercardioid polar pattern, in-line belt-clip preamp, and 1.2 m cable that terminates with a 4-pin miniature (TA4F) connector. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21.1 mV/Pa.

MX185 – The microphone shall be a black electret condenser lavalier microphone with a cardioid polar pattern, in-line belt-clip preamp, and 1.2 m cable that terminates with a 4-pin miniature (TA4F) connector. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 17.0 mV/Pa.

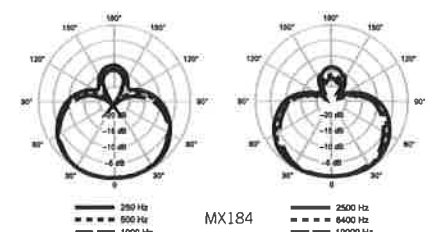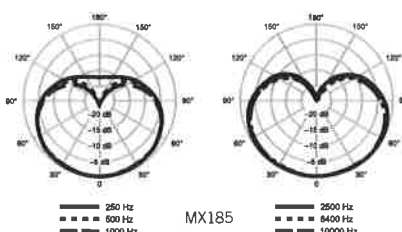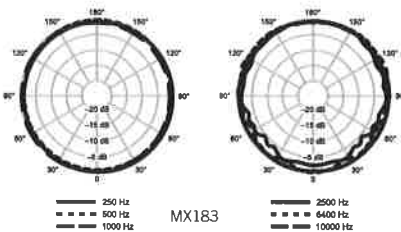

SHURE[®]
 LEGENDARY
 PERFORMANCE™

Europe, Middle East, Africa:
 Shure Europe GmbH
 Jakob-Dieffenbacher-Str. 12,
 75031 Eppingen, Germany

Phone: +49-7262-92490
 Fax: +49-7262-9249114
 Email: info@shure.de
 www.shure.eu

7. PANTALLA TRUSS

- **TRUSS PROLYTE**

PROLYTE TRUSS SYSTEMS



PROLYTE H30L / H30D / H30V TRUSS

Photo : Creativ-Design, Germany



The H30 truss is constructed of main tubes of 48,3 x 3 mm and diagonals of 16 x 2 mm, and uses the CCS6 coupling system.

Prolyte supplies a variety of H30 truss elements that provide maximum flexibility, like standard or custom-made lengths, circles and arches and several types of corners. Prolyte can deliver custom-made pieces on request.



X coupler
1 ring

H coupler
2 rings




The number of recessed rings in the coupler receiver distinguishes the X and H series.


Prolyte H30L top view





Prolyte H30L side view




Prolyte H30D top view





Prolyte H30D side view



Prolyte H30V top view



Prolyte H30V side view



PROLYTE H30L / H30D / H30V TRUSS

PROLYTE H30D - ALLOWABLE LOADING

SPAN		UNIFORMLY DISTRIBUTED LOAD		DEFLECTION		CENTRE POINT LOAD		DEFLECTION		MAXIMUM ALLOWABLE POINT LOADS						SPAN
		UDL				CPL				SINGLE LOAD THIRD POINTS LOAD PER POINT		SINGLE LOAD FOURTH POINTS LOAD PER POINT		SINGLE LOAD FIFTH POINTS LOAD PER POINT		
m	ft	kg/m	lbs/ft	mm	inch	kg	lbs	mm	inch	kg	lbs	kg	lbs	kg	lbs	total weight
1	3.3	1718,7	1156.5	1	0.04	1718,7	3793.3	1	0.04	859,4	1896.6	572,1	1262.6	429,7	948.3	5,0
2	6.6	856,9	576.6	4	0.16	1259,2	2779.1	3	0.12	856,9	1891.1	569,6	1257.1	428,4	945.6	10,0
3	9.8	556,9	374.7	8	0.31	835,3	1843.5	6	0.24	626,5	1382.6	417,7	921.8	346,7	765.1	15,0
4	13.1	311,1	209.3	14	0.55	622,1	1373.0	11	0.43	466,6	1029.7	311,1	686.5	258,2	569.8	20,0
5	16.4	197,3	132.7	22	0.87	493,2	1088.5	18	0.71	369,9	816.3	246,6	544.2	204,7	451.7	25,0
6	19.7	135,5	91.2	32	1.26	406,4	896.9	26	1.02	304,8	672.7	203,2	448.5	168,7	372.2	30,0
7	23.0	98,2	66.1	44	1.73	343,7	758.5	35	1.38	257,8	568.9	171,9	379.3	142,6	314.8	35,0
8	26.2	74,0	49.8	57	2.24	296,1	653.4	46	1.81	222,0	490.0	148,0	326.7	122,9	271.2	40,0
9	29.5	57,4	38.6	72	2.83	258,4	570.4	58	2.28	193,8	427.8	129,2	285.2	107,3	236.7	45,0
10	32.8	45,6	30.7	89	3.50	227,8	502.8	71	2.79	170,9	377.1	113,9	251.4	94,6	208.7	50,0
11	36.1	36,8	24.8	108	4.25	202,4	446.6	86	3.39	151,8	334.9	101,2	223.3	84,0	185.3	55,0
12	39.4	30,1	20.3	128	5.04	180,7	398.8	103	4.06	135,5	299.1	90,4	199.4	75,0	165.5	60,0
13	42.6	24,9	16.8	150	5.91	162,0	357.5	120	4.72	121,5	268.1	81,0	178.8	67,2	148.4	65,0
14	45.9	20,8	14.0	174	6.85	145,6	321.3	140	5.51	109,2	241.0	72,8	160.7	60,4	133.4	70,0
15	49.2	17,5	11.8	200	7.87	131,1	289.3	160	6.30	98,3	216.9	65,5	144.6	54,4	120.0	75,0
16	52.5	14,8	9.9	228	8.98	118,0	260.5	182	7.17	88,5	195.4	59,0	130.2	49,0	108.1	80,0

1 inch = 25,4 mm | 1m = 3,28 ft | 1 lbs = 0,453 kg

- Loading figures only valid for static loads and spans with two supporting points
- Spans must be supported at each end
- If dynamic loads or wind loads are involved, or more supporting points are applied, contact a structural engineer or Prolyte
- Loading figures are based on German DIN standards; to comply with BS 7905-2 / ANSI E1.2-2006 / CWA 15902-2, the loading data must be multiplied by 0.85
- The self-weight of the trusses has already been taken into account
- For spans longer than indicated and with a different loading set-up use the KYLo programme
- For structures contact Prolyte



Mark approval certificate No. 2233/04
Test report No. 2232/04
TÜV certification only valid for loading table above.

TECHNICAL SPECIFICATIONS H30 SERIES

Types	Ladder (L), Triangle (D), Square (V)
Alloy	EN AW 6082 T6
Main tubes (chords)	48,3 x 3 mm
Braces	16 x 2 mm
Coupling system	CCS6 series

Type		H30D	H30V	
Allowable Normal Force in Main Chord	N	30,54	30,54	kN
Allowable Normal Force in Diagonals	N	7,04	7,04	kN
Surface area Complete Truss	A	12,72	16,96	cm ²
Moment of Inertia Y-axis	I _y	1057,3	2095,9	cm ⁴
Moment of Inertia Z-axis	I _z	1047,9	2095,9	cm ⁴
Allowable bending moment Y-axis	M _y	6,32	14,60	kNm
Allowable bending moment Z-axis	M _z	7,30	14,60	kNm
Allowable shear force Z-axis	Q _z /V _z	8,62	9,95	kN
Allowable shear force Y-axis	Q _y /V _y	4,98	9,95	kN
Selfweight	kg	5	6,3	kg/m

30 SERIES - STANDARD AVAILABLE LENGTHS AND CODES

Meters	Feet	Code*
0,25 / 1,00 m in steps of 5 mm	0.82' / 3.28' in steps of 0.2"	
0,25	0.83	H30*-L025
0,29	0.95	H30*-L029
0,50	1.90	H30*-L050
0,71	2.32	H30*-L071
1,00	3.28	H30*-L100
1,50	4.57	H30*-L150
2,00	6.56	H30*-L200
2,50	8.20	H30*-L250
3,00	9.84	H30*-L300
3,50	11.48	H30*-L350
4,00	13.12	H30*-L400
4,50	14.76	H30*-L450
5,00	16.40	H30*-L500

*on * indicate L for ladder, D for triangle or V for Square truss. Example: H30V-L200

PROLYTE H30V TRUSS

PROLYTE H30V - ALLOWABLE LOADING																
SPAN		UNIFORMLY DISTRIBUTED LOAD		DEFLECTION		MAXIMUM ALLOWABLE POINT LOADS										SPAN
						CENTRE POINT LOAD		DEFLECTION		SINGLE LOAD THIRD POINTS		SINGLE LOAD FOURTH POINTS		SINGLE LOAD FIFTH POINTS		
m	ft	kg/m	lbs/ft	mm	inch	kg	lbs	mm	inch	kg	lbs	kg	lbs	kg	lbs	total weight
1	3.3	1984,1	1335.0	1	0.04	1984,1	4378.9	1	0.04	992,1	2189.5	660,3	1457.3	496,0	1094.7	6,3
2	6.6	988,9	665.4	4	0.16	1977,8	4365.0	3	0.12	988,9	2182.5	657,2	1450.4	494,5	1091.3	12,6
3	9.8	657,2	442.2	9	0.35	1936,7	4274.4	7	0.28	985,8	2175.6	654,0	1443.4	492,9	1087.8	18,9
4	13.1	491,3	330.6	17	0.67	1447,0	3193.6	13	0.51	982,6	2168.6	650,9	1436.5	491,3	1084.3	25,2
5	16.4	391,8	263.6	26	1.02	1152,0	2542.4	21	0.83	864,0	1906.8	576,0	1271.2	478,1	1055.1	31,5
6	19.7	318,1	214.0	37	1.46	954,2	2105.9	30	1.18	715,6	1579.4	477,1	1052.9	396,0	873.9	37,8
7	23.0	232,0	156.1	51	2.01	812,0	1792.1	41	1.61	609,0	1344.1	406,0	896.1	337,0	743.7	44,1
8	26.2	176,2	118.5	66	2.60	704,6	1555.1	53	2.09	528,5	1166.3	352,3	775.5	292,4	645.4	50,4
9	29.5	137,9	92.8	84	3.31	620,4	1369.2	67	2.64	465,3	1026.9	310,2	684.6	257,5	568.2	56,7
10	32.8	110,5	74.3	104	4.09	552,4	1219.0	83	3.27	414,3	914.3	276,2	609.5	229,2	505.9	63,0
11	36,1	90,2	60.7	125	4.92	496,1	1095.0	100	3.94	372,1	821.2	248,1	547.5	205,9	454.4	69,3
12	39.4	74,8	50.3	149	5.87	448,7	990.4	119	4.69	336,6	742.8	224,4	495.2	186,2	411.0	75,6
13	42.6	62,8	42.3	175	6.89	408,2	900.8	140	5.51	306,1	675.6	204,1	450.4	169,4	373.8	81,9
14	45.9	53,3	35.8	203	7.99	372,9	823.1	163	6.42	297,7	617.3	186,5	411.5	154,8	341.6	88,2
15	49.2	45,6	30.7	233	9.17	342,0	754.8	187	7.36	256,5	566.1	171,0	377.4	141,9	313.2	94,5
16	52.5	39,3	26.5	265	10.43	314,5	694.1	212	8.35	235,9	520.6	157,3	347.1	130,5	288.1	100,8

1 inch = 25,4 mm | 1m = 3.28 ft | 1 lbs = 0,453 kg

- Loading figures only valid for static loads and spans with two supporting points
- Spans must be supported at each end
- If dynamic loads or wind loads are involved, or more supporting points are applied, contact a structural engineer or Prolyte
- Loading figures are based on German DIN standards; to comply with BS 7905-2 / ANSI E1.2-2006 / CWA 15902-2, the loading data must be multiplied by 0.85
- The self-weight of the trusses has already been taken into account
- For spans longer than indicated and with a different loading set-up use the KYLo programme
- For structures contact Prolyte




Mark approval certificate No. 2256/04
 Test report No. 2255/04
 TÜV certification only valid for loading table above.

PROLYTE H30L TRUSS

PROLYTE H30L - ALLOWABLE LOADING (SPAN SUPPORTED ON TOP CHORD)

SPAN		UNIFORMLY DISTRIBUTED LOAD		DEFLECTION		CPL		DEFLECTION	
m	ft	kg/m	lbs/ft	mm	inch	kg	lbs	mm	inch
1	3.3	992,2	667.6	0	0	992,2	2189.8	0	0
2	6.6	359,0	241.6	1	0.04	389,0	858.5	1	0.04
3	9.8	135,0	90.8	2	0.08	203,0	448.0	2	0.08
4	13.1	52,0	35.0	2	0.08	104,0	229.5	2	0.08
5	16.4	25,0	16.8	3	0.12	62,0	136.8	2	0.08
6	19.7	11,0	7.4	3	0.12	33,0	72.8	2	0.08

1 inch = 25,4 mm | 1m = 3.28 ft | 1 lbs = 0,453 kg

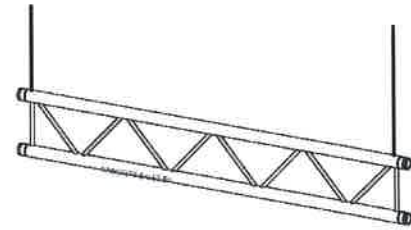


Spans must be supported at each end.
Loads must be suspended from bottom chord only.

PROLYTE H30L - ALLOWABLE LOADING (TOP CHORD SIDEWAYS SUPPORTED EACH METRE)

SPAN		UNIFORMLY DISTRIBUTED LOAD		DEFLECTION		CPL		DEFLECTION	
m	ft	kg/m	lbs/ft	mm	inch	kg	lbs	mm	inch
4	13.1	245,8	165.4	17	0.67	724,0	1597.9	13	0.51
5	16.4	196,0	131.9	26	1.02	576,5	1272.3	21	0.83
6	19.6	159,2	107.1	37	1.46	477,7	1054.2	30	1.18
7	23.0	116,2	78.2	51	2.01	406,6	897.5	41	1.61
8	26.2	88,3	59.4	66	2.60	353,0	779.1	53	2.09
9	29.5	69,1	46.5	84	3.31	310,9	686.3	67	2.64
10	32.8	53,3	35.8	100	3.94	277,0	611.3	83	3.27
11	36.1	39,3	26.4	110	4.33	249,0	549.4	100	3.94
12	39.4	29,6	19.9	120	7.72	225,3	497.3	119	4.69

1 inch = 25,4 mm | 1m = 3.28 ft | 1 lbs = 0,453 kg

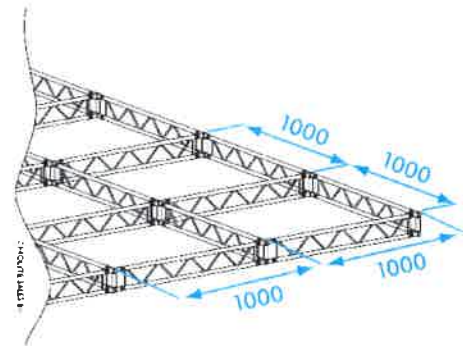


Spans must be supported at each end.
Loads must be suspended from bottom chord only.

PROLYTE H30L - ALLOWABLE LOADING (TOP CHORD SIDEWAYS SUPPORTED EVERY 2 METRES)

SPAN		UNIFORMLY DISTRIBUTED LOAD		DEFLECTION		CPL		DEFLECTION	
m	ft	kg/m	lbs/ft	mm	inch	kg	lbs	mm	inch
4	13.1	95,0	63.9	4	0.16	190,0	419.3	4	0.16
5	16.4	59,7	40.2	7	0.28	149,3	329.5	6	0.24
6	19.7	40,6	27.3	10	0.39	121,7	268.5	8	0.31
7	23.0	29,0	19.5	14	0.55	101,5	224.0	11	0.43
8	26.2	21,5	14.5	18	0.71	86,0	189.8	14	0.55
9	29.5	16,4	11.0	23	0.91	73,6	162.5	18	0.71
10	32.8	12,7	8.5	28	1.10	63,4	139.9	22	0.87
11	36.1	10,0	6.7	34	1.34	54,8	120.9	27	1.06
12	39.4	7,9	5.3	40	1.57	47,3	104.5	32	1.26

1 inch = 25,4 mm | 1m = 3.28 ft | 1 lbs = 0,453 kg

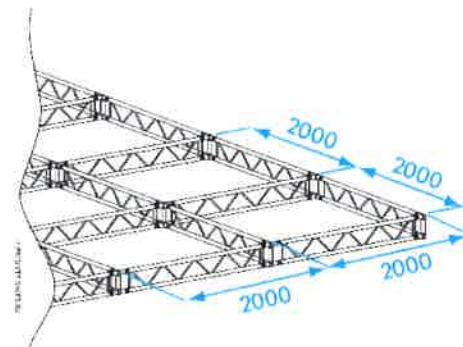

Spans must be supported at each end.
Loads must be suspended from bottom chord only.

7. PROYECTORES DE RECORTE

- **ETC SOURCE FOUR 55° 30° ZOOM**